

Network Video Recorder

NVR301-L-P Series



NVR301-L-P

Key Features

- Support Ultra 265/H.265/H.264 video formats
- 4/8/16-channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 1 SATA HDD up to 10 TB
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade


Specifications

| Model | NVR301-04L-P4 | NVR301-08L-P8 | NVR301-16L-P8 |
|---------------------------|---|---|--------------------|
| Video/Audio Input | | | |
| IP Video Input | 4-ch | 8-ch | 16-ch |
| Two-way Audio Input | 1-ch, RCA | | |
| Network | | | |
| Incoming Bandwidth | 40Mbps | 60Mbps | 60Mbps |
| Outgoing Bandwidth | 64Mbps | 64Mbps | 80Mbps |
| Remote Users | 128 | | |
| Protocols | P2P, UPnP, NTP, DHCP, PPPoE | | |
| Video/Audio Output | | | |
| HDMI/VGA Output | HDMI: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz | | |
| Recording Resolution | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | | |
| Audio Output | 1-ch, RCA | | |
| Synchronous Playback | 4-ch | 8-ch | 16-ch |
| Corridor Mode Screen | 3/4 | 3/4/5/7/9 | 3/4/5/7/9/10/12/16 |
| Decoding | | | |
| Decoding format | Ultra 265, H.265, H.264 | | |
| Live view/ Playback | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | | |
| Capability | 1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1 | | |
| Hard Disk | | | |
| SATA | 1 SATA interface | | |
| Capacity | up to 10TB for each disk | | |
| Smart | | | |
| VCA Detection | Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking | | |
| VCA Search | Face search, Behavior search | | |
| Statistical Analysis | People counting | | |
| External Interface | | | |
| Network Interface | 1 RJ-45 10M/100M self-adaptive Ethernet Interface | | |
| USB Interface | Rear panel: 2 x USB2.0 | | |
| PoE | | | |
| Interface | 4 independent 100 Mbps PoE | 8 independent 100 Mbps PoE network interfaces | |

| | | |
|------------------------|--|---|
| | network interfaces | |
| Max Power | Max 30W for single port Max 54W in total (13.5W for each) | Max 30W for single port Max 108W in total (13.5W for each) |
| Supported Standard | IEEE 802.3at, IEEE 802.3af | |
| General | | |
| Power Supply | 48V DC Power Consumption: ≤ 8 W(without HDD) | 52V DC Power Consumption: ≤ 8 W(without HDD) |
| Working Environment | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing) | |
| Dimensions(W×D×H) | 42 × 205 × 205mm (1.7" × 8.1" × 8.1") | 270mm×205mm × 42mm (10.6" ×8.1"× 1.7") |
| Weight (without HDD) | 0.59kg (1.3 lb) | ≤ 0.68 Kg (1.50 lb) |


Dimensions

Take NVR301-08L-P8 for example

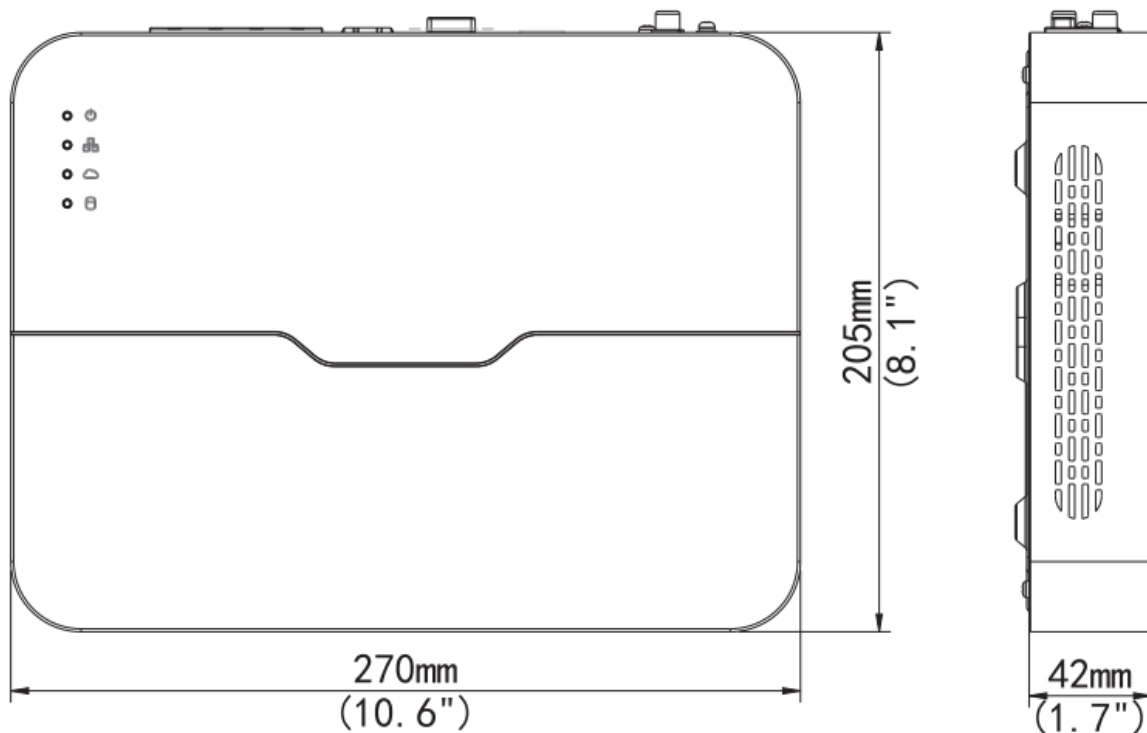

Rear Panel

Take NVR301-08L-P8 for example

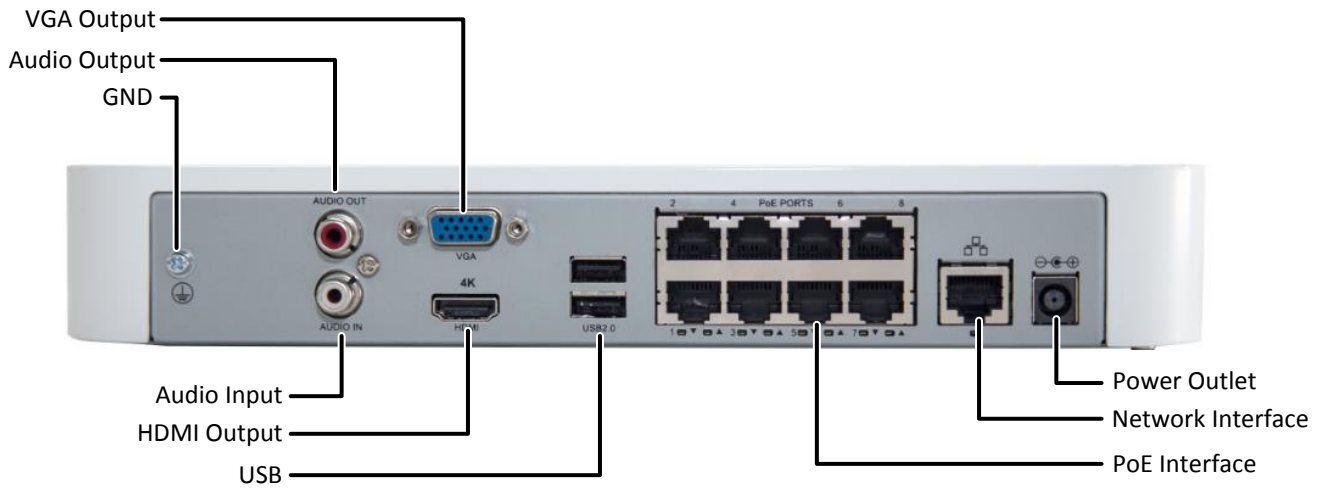

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

KIT IP 4K Contiene:

1NVR301-04L-P4:

- Soporta formatos de video Ultra 265 / H.265 / H.264
- Entrada de 4 canales
- Plug & Play con 4 interfaces de red PoE independientes
- Cámaras IP de terceros compatibles con el cumplimiento de ONVIF: perfil S, perfil G, perfil C, perfil Q, perfil A, perfil T
- Soporta HDMI de 1 canal, VGA de 1 canal, resolución HDMI de hasta 4K (3840x2160)
- Salida simultánea HDMI y VGA
- Grabación de resolución de hasta 8 megapíxeles265 / ANALITICAS / SERIE PRIME

4 Cámaras IP IPC2128SR3-DPF40:

- Alta Definición de 8 MegaPíxeles 4K
- Compresión ULTRA 265
- Lente motorizado incorporada para zoom remoto
- WDR de 120 dB
- Cristal Anti-Reflejo IR para aumentar la transmisión IR.
- IR inteligente, hasta 30 m (98 pies) de distancia IR

1 Disco DuroHDW10PURX /HDW10PURZ:

- Ideal para videovigilancia.
- 64m cache
- Forma 3.5"
- SATA 6GB
- 5400 RPM